

Smart String Inverter

SUN2000-100KTL-H1



Smart

- 12 strings intelligent monitoring and fast trouble-shooting
- Power Line Communication (PLC) supported
- Smart I-V Curve Diagnosis supported

Efficient

- Max. efficiency 99.0%,
- European efficiency 98.8%
- 6 MPPT per unit, effectively reducing string mismatch

Safe

- DC switch integrated, safe and convenient for maintenance
- Residual Current Monitoring Unit (RCMU) integrated
- Fuse free design

Reliable

- Natural cooling technology
- Protection degree of IP65
- Type II surge arresters for both DC and AC


Smart String Inverter (SUN2000-100KTL-H1)




Technical Specifications		SUN2000-100KTL-H1
		Efficiency
Max. Efficiency		99.0%
European Efficiency		98.8%
		Input
Max. Input Voltage		1,500 V
Max. Current per MPPT		22 A
Max. Short Circuit Current per MPPT		33 A
Start Voltage		650 V
MPPT Operating Voltage Range		600 V ~ 1,500 V
Rated Input Voltage		1,080 V
Number of Inputs		12
Number of MPP Trackers		6
		Output
Rated AC Active Power		100,000 W
Max. AC Apparent Power		105,000 VA
Max. AC Active Power (cosφ=1)		105,000 W
Rated Output Voltage		800 V, 3W + PE
Rated AC Grid Frequency		50 Hz / 60 Hz
Rated Output Current		72.2 A
Max. Output Current		80.2 A
Adjustable Power Factor Range		0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion		< 3%
		Protection
Input-side Disconnection Device		Yes
Anti-islanding Protection		Yes
AC Overcurrent Protection		Yes
DC Reverse-polarity Protection		Yes
PV-array String Fault Monitoring		Yes
DC Surge Arrester		Type II
AC Surge Arrester		Type II
DC Insulation Resistance Detection		Yes
Residual Current Monitoring Unit		Yes
		Communication
Display		LED Indicators, Bluetooth + APP
RS485		Yes
USB		Yes
Power Line Communication (PLC)		Yes
		General
Dimensions (W x H x D)		1,075 x 605 x 310 mm (42.3 x 23.8 x 12.2 inch)
Weight (with mounting plate)		77 kg (169.8 lb.)
Operating Temperature Range		-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method		Natural Convection
Max. Operating Altitude		4,000 m (13,123 ft.)
Relative Humidity		0 ~ 100%
DC Connector		Amphenol UTX
AC Connector		Waterproof PG Terminal + Terminal Clamp
Protection Degree		IP65
Topology		Transformerless
		Standard Compliance (more available upon request)
Certificate		EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683
Grid Code		IEC 61727, UTE C 15-712-1, RD 413, RD 1699, RD 661, P.O. 12.3, UNE 206007-1 IN, UNE 2006006 IN



Efficiency Curve

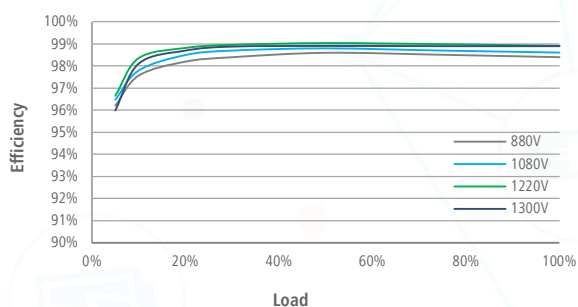

Circuit Diagram

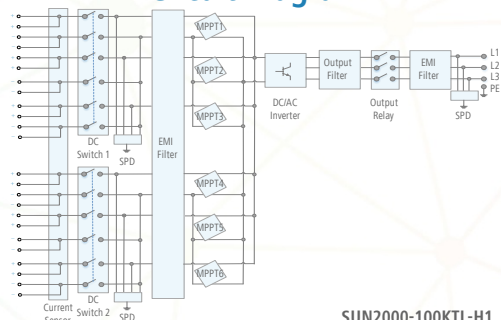

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solarchuawei.com. Version No.01-(201807)